



Automatic Girth Welder

Input Power 115VAC 15A

Travel Speed 0-100 I.P.M.

Plate Course 6-10 ft.

Plate thickness 1/4-1 1/4 inch

Minimum Diameter 19 ft.

Shipping Wt. 1800 Lbs.

AGW-1 fitted with Lincoln NA-3 welding head, Control Box,  
vertical and horizontal adjusters, cross seam adjuster, wire  
straightener, wire reel and flux hopper, for submerged arc welding  
Baldor travel motor and controller. Flux recovery tank and  
Industrial vacuum cleaner. Upholstered Seat. Flux Conveyor with  
Kevlar belt. 250 ft. interconnecting cable group. Cable Support Boom

AGW-1

Overall dimensions

Forward View


Vacuums  
Cleaner  
Basket can  
be selected

73"

55"

40 1/2"

94" To top of lifting  
Lug  
Lug extends 3" from  
top of frame

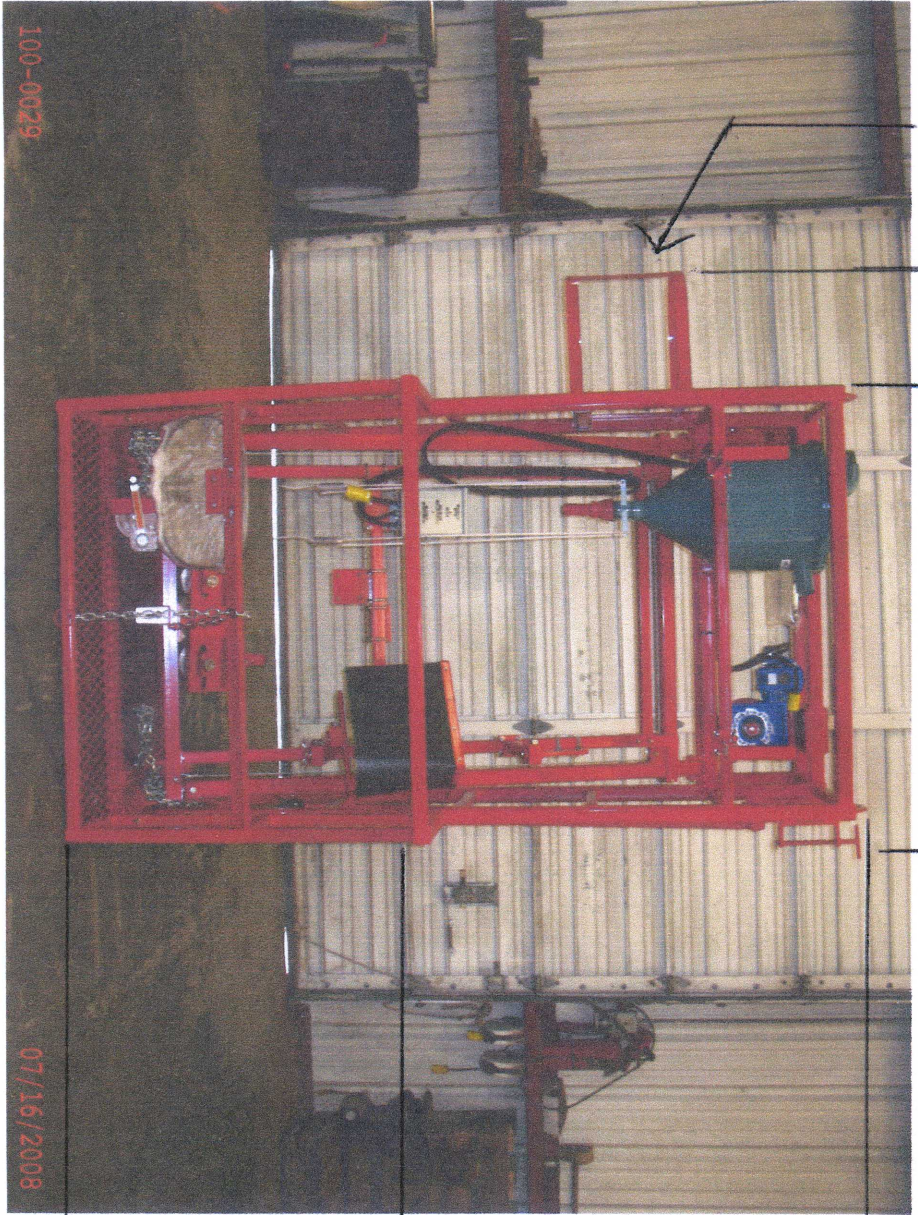


100-0029

07/16/2008

AG-03-1

overall dimensions

Side View

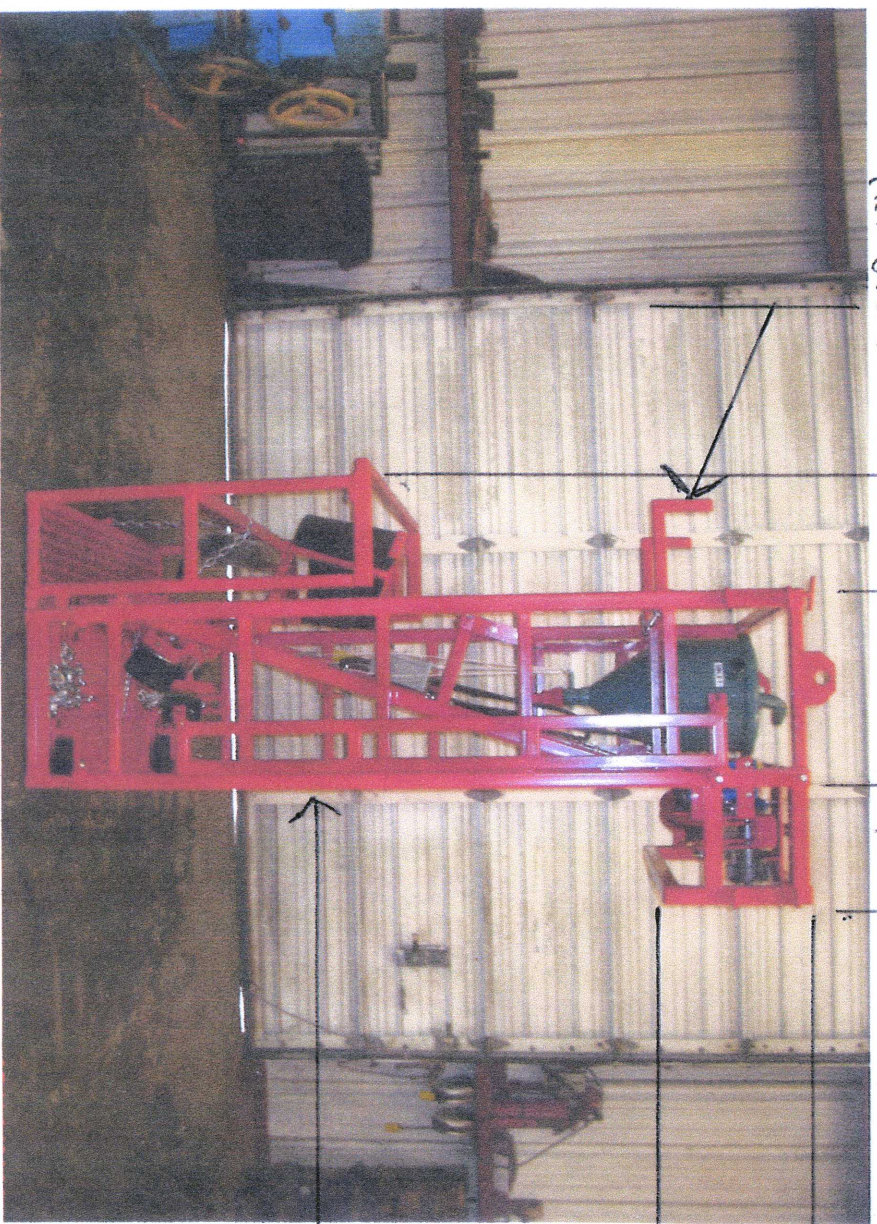

Cable Storage Hooks are Removable

49 1/2"

35"

13"

5 1/2"

Center of Wheel

16"

Cable Support Boom shown in transport position